

BRUSHLESS MOTOR CATALOG










Brushless motor lineup

For more information







Brushless DC Motors / Controllers

Motor	Flange Size	Sensor	Rated Voltage	Rated Output	Rated Torque	Rated Speed	Degree of Protection	Option		Contoroller	Page
								Reduction Ratio	Static Brake		
 ID-629ZB	40 mm	Hall sensor	24 V	15 W ^{*1}	0.05 Nm ^{*1}	3,000 r/min ^{*1}	—	—	—	Built-in Microcomputer	Details in separate leaflet
 ID-659ZB	40 mm	Hall sensor	24 V	70 W ^{*1}	0.14 Nm ^{*1}	4,750 r/min ^{*1}	—	—	—	Built-in Microcomputer	Details in separate leaflet
 IS-74BZA	60 mm	Hall sensor	24 V	200 W	0.6 Nm	3,200 r/min	IPX4	10 : 1 20 : 1	●	●	P04, P06, P07
 IR-74BZA	60 mm	Resolver sensor	24 V	200 W	0.6 Nm	3,200 r/min	IPX4	10 : 1 20 : 1	● ^{*1}	● ^{*1}	P12, P13
 IS-94BZC	85 mm	Hall sensor	24 V	250 W	1.0 Nm	2,400 r/min	IPX4	10 : 1 20 : 1	●	●	P04, P05 P08, P09 P10, P11
 IR-94BZA	85 mm	Resolver sensor	48 V	355 W	1.0 Nm	3,400 r/min	IPX4	10 : 1 20 : 1	●	●	P12, P13 P14, P15
 IS-B5BZA	100 mm	Hall sensor	48 V	640 W	2.3 Nm	2,660 r/min	IPX4	20 : 1	● ^{*1}	● ^{*1}	P04, P05 P06, P07

For models marked with *1, please contact our sales department

Frameless Brushless DC Motors

Stator / Rotor	Stator Diameter	Rated Voltage	Rated Output	Rated Torque	Rated Speed	Page
 IA-A3BZA IB-A3BZA	Φ 60 mm	48 V	200 W	0.42 Nm	4,600 r/min	P18 , P19
 IA-B4BZA IB-B4BZA	Φ 75 mm	48 V	500 W	0.9 Nm	5,300 r/min	
 IA-C5BZA IB-C5BZA	Φ 90 mm	48 V	650 W	1.3 Nm	4,800 r/min	
 IA-D5BZA IB-D5BZA	Φ 120 mm	48 V	950 W	3.4 Nm	2,700 r/min	

Compact design enabling Product miniaturization

Mabuchi brushless motors generate high output for their size.Engineered to be slim, their structure provides flexible product design. Combined with our compact motor controllers, Mabuchi motors contribute to space-saving design with more room for the battery and other components.

IPX4-rated protection

Mabuchi motors and controllers have an IPX4 rating. The water-resistant design is ideal for products operated in demanding conditions and outdoors (e.g. delivery robots, agricultural robots).



Motor efficiency up to 90%

Mabuchi motors offer high efficiency (ratio of electrical energy input to mechanical energy output) due to their unique magnetic circuit design, thus improving power consumption and contributing to carbon neutrality and Sustainable Development Goals (SDGs) metrics.



Low-EMI design


Mabuchi motor controllers have an EMI-suppressing design, compliant with CISPR32 Class B. This design ensures reduced risk of product malfunction caused by communication failures. As such, no external noise-suppressing is needed.

IS Series


The IS Series brushless DC motors equipped with an uniquely-designed magnetic circuit are optimized for battery-powered commercial robots and various types of industrial equipment. Three different rated outputs and three different flange side dimensions are available.

Model	IS-74BZA	IS-94BZC	IS-B5BZA
Instant Maximum Output	280 W (10 sec max.)	410 W (10 sec max.)	1,000 W (10 sec max.)
Instant Maximum Torque	0.9 Nm (10 sec max.)	2.0 Nm (10 sec max.)	4.0 Nm (10 sec max.)
Rated Voltage	24 V		48 V
Rated Output	200 W	250 W	640 W
Rated Torque	0.6 Nm	1.0 Nm	2.3 Nm
Rated Speed	3,200 r/min	2,400 r/min	2,660 r/min
Operating Voltage	15-55 V		
Size	60.0 mm x 60.0 mm x 44.5 mm	85.0 mm x 85.0 mm x 45.5 mm	100.0 mm x 100.0 mm x 54.0 mm
Weight	0.52 kg	0.83 kg	1.76 kg
Withstand Voltage	500 V AC 1 minute (between terminal and case)		
Insulation Resistance	10 MΩ min. (500 V DC)		
Degree of protection	IPX4 (Waterproof except at base of motor shaft. Must use dedicated waterproof mating connector.)		


IS-74BZA

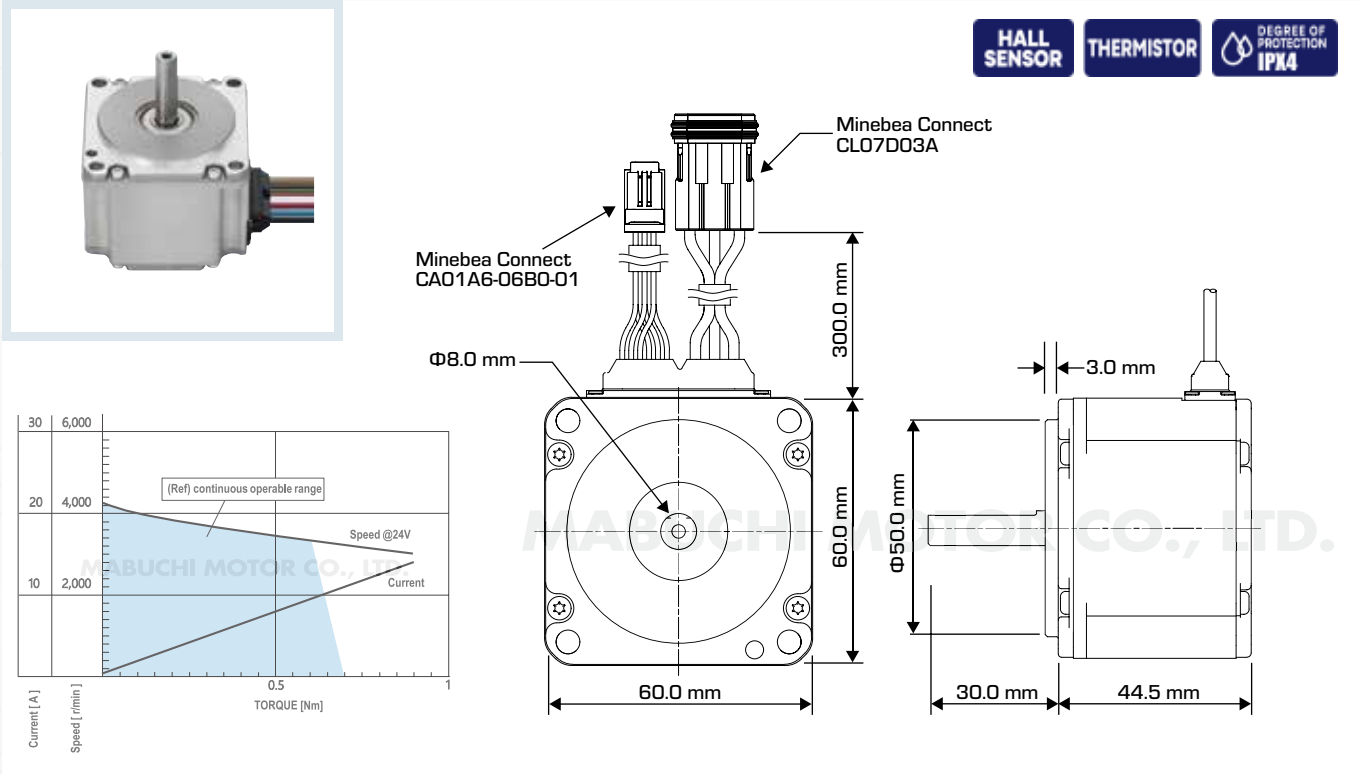

IS-94BZC

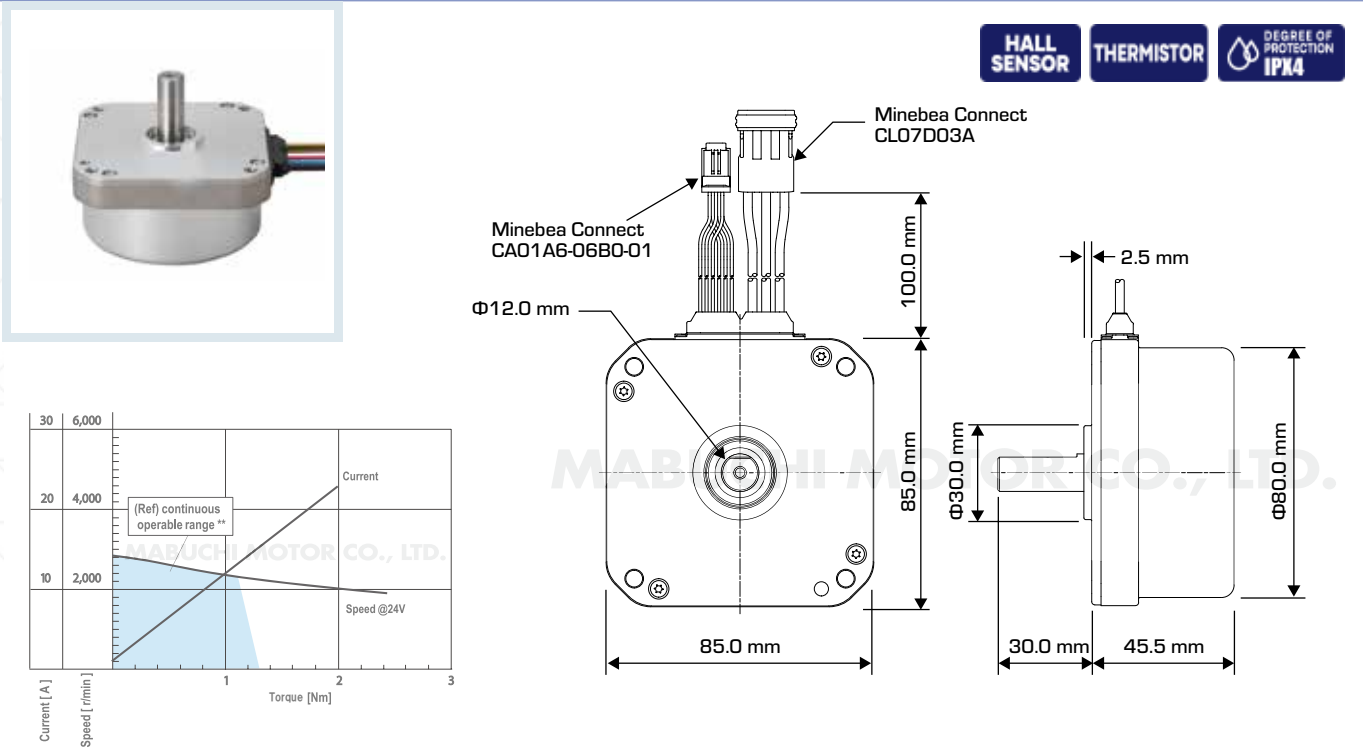

IS-B5BZA

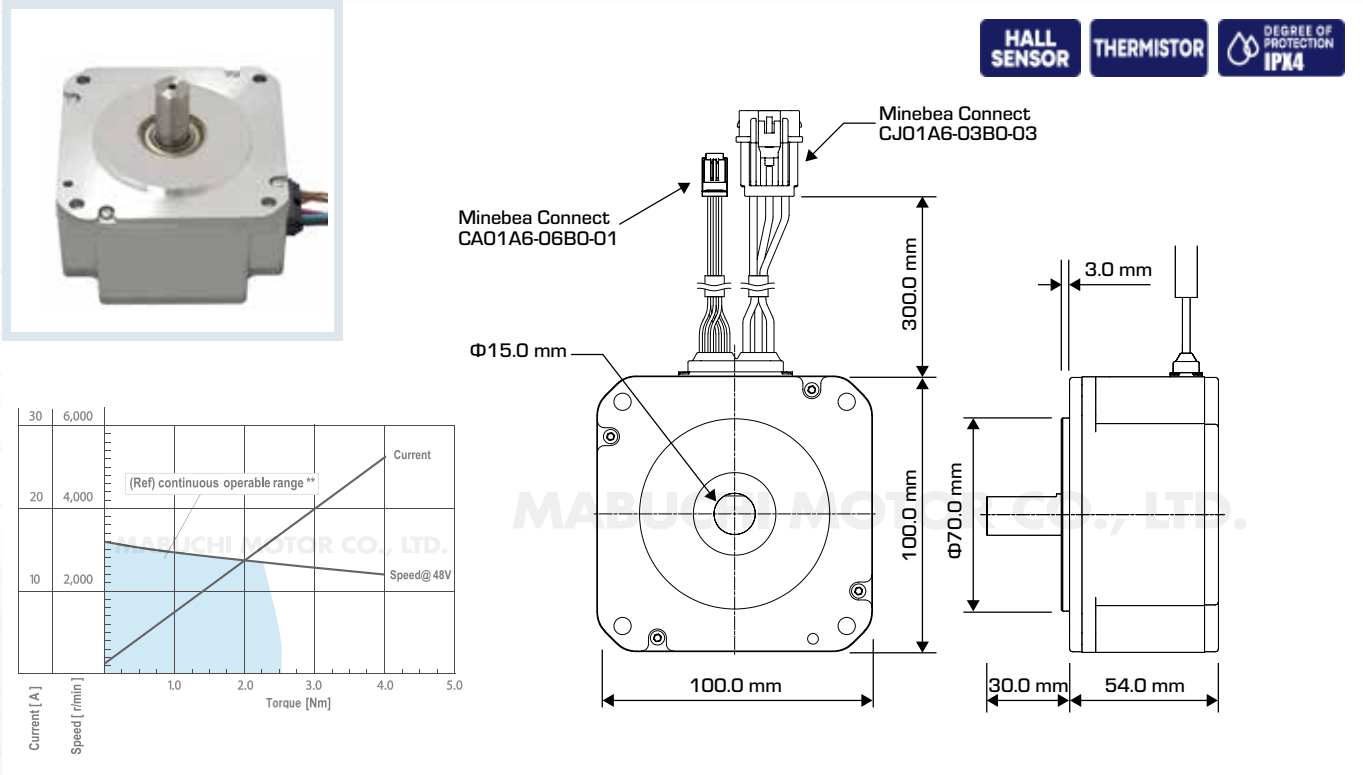

MS Series


The MS series brushless DC motor combines the IS series with additional accessories (gear reducer, static brake, foot-mount, wheel). The planetary gears offer reduction ratios of 10:1 and 20:1.

Model	MS-74BZA	MS-74BZB	MS-74BZD	MS-B5BZD
Instant Maximum Output	140 W (10 sec max.)		115 W (10sec max.)	760 W (10 sec max.)
Instant Maximum Torque	7.5 Nm (10 sec max.)		13.8 Nm (10 sec max.)	64 Nm (10 sec max.)
Rated Voltage	24 V		24 V	48 V
Rated Output	100 W		90 W	495 W
Rated Torque	4.8 Nm		8.7 Nm	36.4 Nm
Rated Speed	200 r/min		100 r/min	130 r/min
Operating Voltage	15 - 55 V			
Size	60.0 mm × 60.0 mm × 93.3 mm	60.0 mm × 60.0 mm × 138.8 mm	60.0 mm × 60.0 mm × 110.7 mm	100.0 mm × 100.0 mm × 132.0 mm
Weight	1.06 kg	1.4 kg	1.4 kg	5.7 kg
Reduction Ratio	10 : 1		20 : 1	
Allowable Radial Load Bearing	650 N			2,000 N
Allowable Load Inertia	0.26 kg/m2 max. (Applicable Acceleration Rate: 200 r/min/s)			TBD*
Withstand Voltage	500 V AC 1 minute (between terminal and case)			
Insulation Resistance	10 MΩ min. (500 V DC)			
Static Brake Operation Voltage at 20°C (ambient)	—	Power off type (for holding & emergency stops), Release voltage 24V, Holding voltage 12V	—	—
Material	—	—	—	—
Degree of protection	IPX4 (Must use dedicated waterproof mating connector.)			


TBD*: under development

MS-74BZA


● High durability against radial load

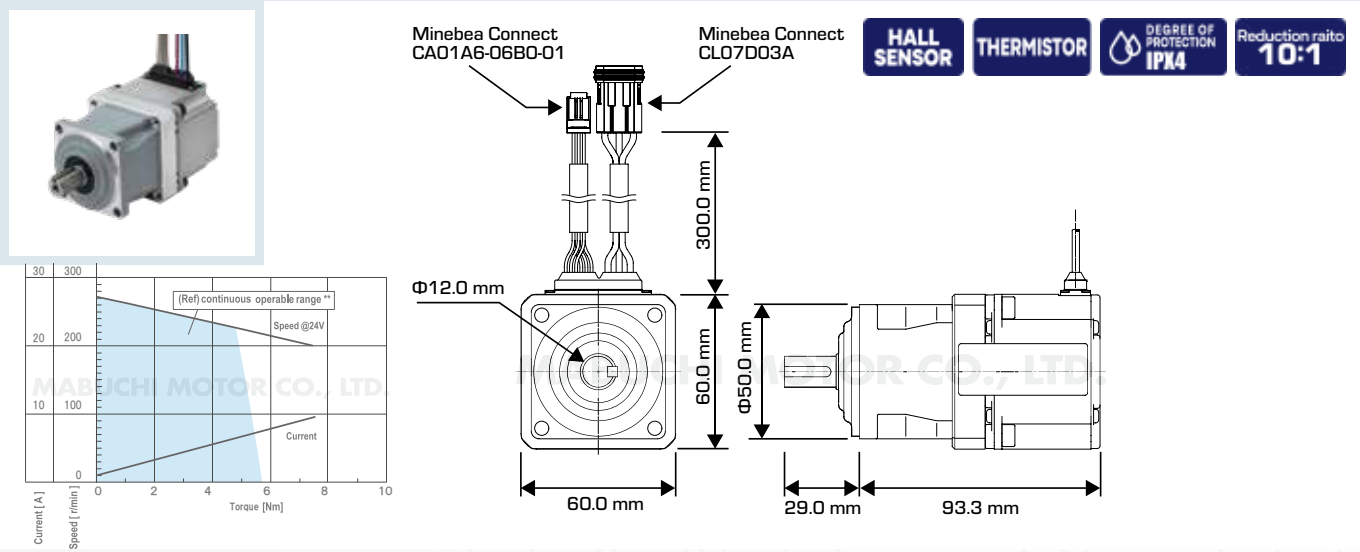


MS-74BZB (Coming soon)

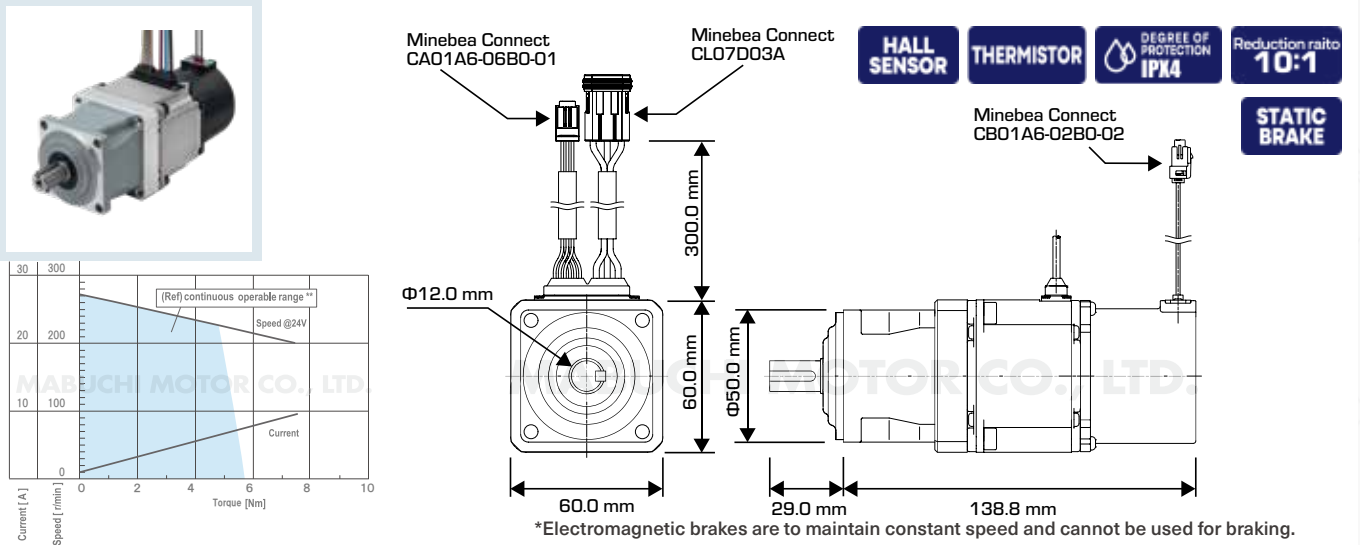

MS-74BZD (Coming soon)

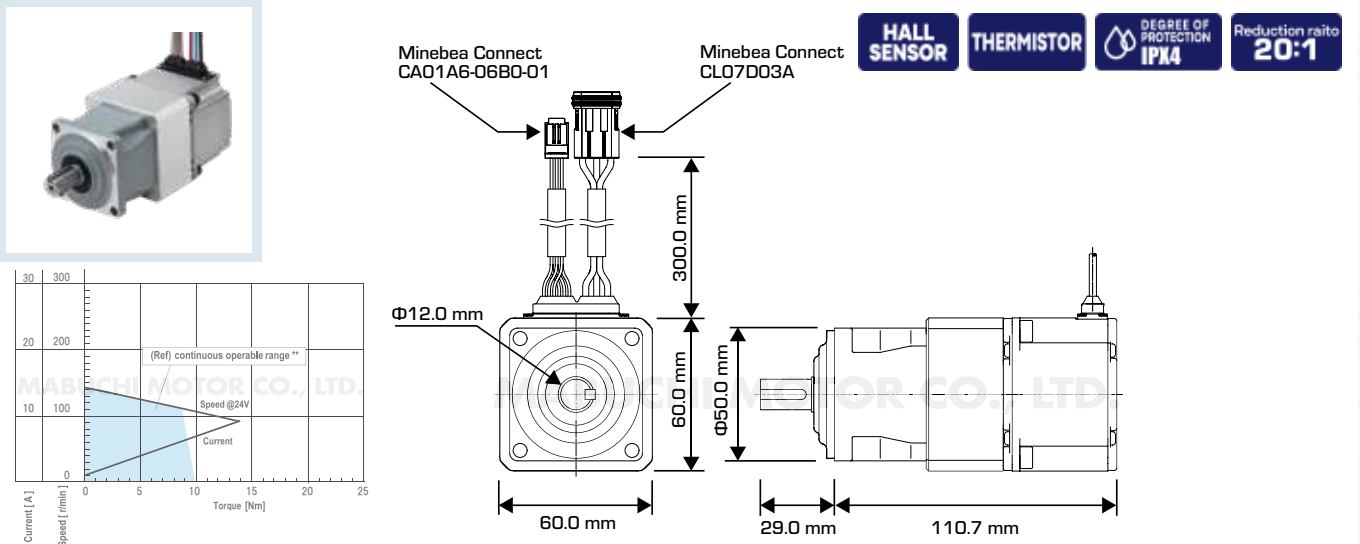




MS-B5BZD (Coming soon)

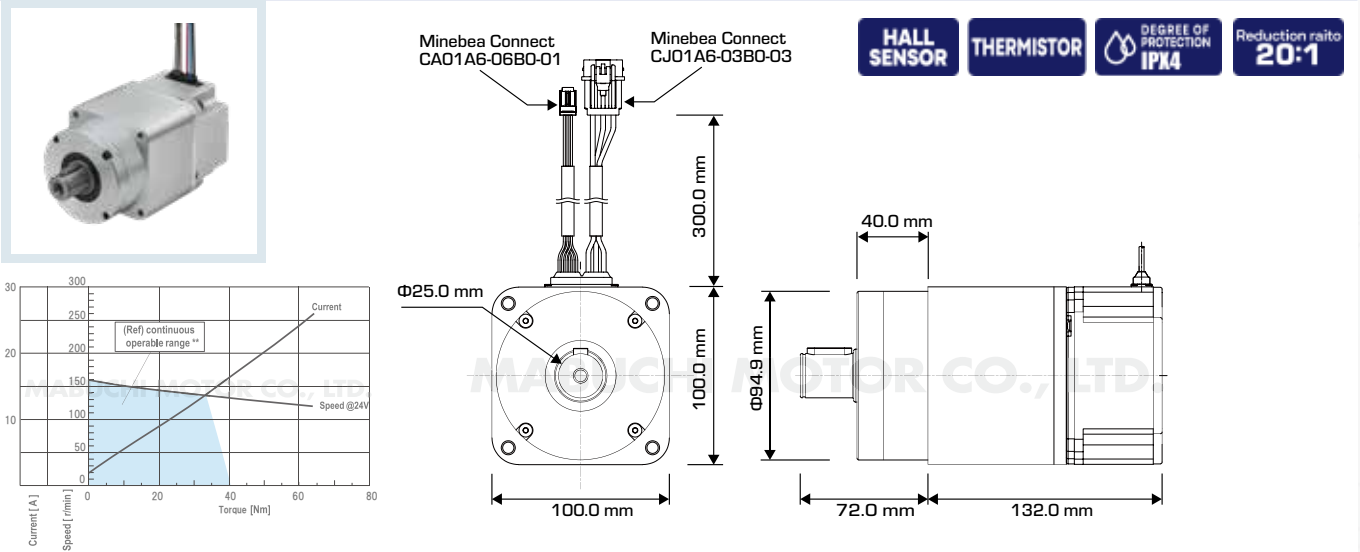

MS Series

The MS series brushless DC motor combines the IS series with additional accessories (gear reducer, static brake, foot-mount, wheel). The planetary gears offer reduction ratios of 10:1 and 20:1.




Model	MS-94BZA	MS-94BZB	MS-94BZC
Instant Maximum Output	342 W (10 sec max.)		
Instant Maximum Torque	17.2 Nm (10 sec max.)		
Rated Voltage	24 V		
Rated Output	202 W		
Rated Torque	8.6 Nm		
Rated Speed	225 r/min		
Operating Voltage	15 - 55 V		
Size	85.0 mm x 85.0 mm x 84.5 mm	85.0 mm x 85.0 mm x 126.5 mm	150.0 mm x 187.5 mm x 200.0 mm (Wheel Diameter : Φ150.0 mm)
Weight	2.2 kg	2.8 kg	4.5kg
Reduction Ratio	10.33 : 1		
Allowable Radial Load Bearing	700 N		
Allowable Load Inertia	0.6 kg/m2 max. (Applicable Acceleration Rate: 200 r/min/s)		
Withstand Voltage	500 V AC 1 minute (between terminal and case)		
Insulation Resistance	10 MΩ min. (500 V DC)		
Static Brake Operation Voltage at 20°C (ambient)	Power off type (for holding & emergency stops), Release voltage 24V, Holding voltage 12V		
Material	Wheels, Brackets: ADC12		
	Wheels: Natural rubber		
Degree of protection	IPX4 (Must use dedicated waterproof mating connector.)		

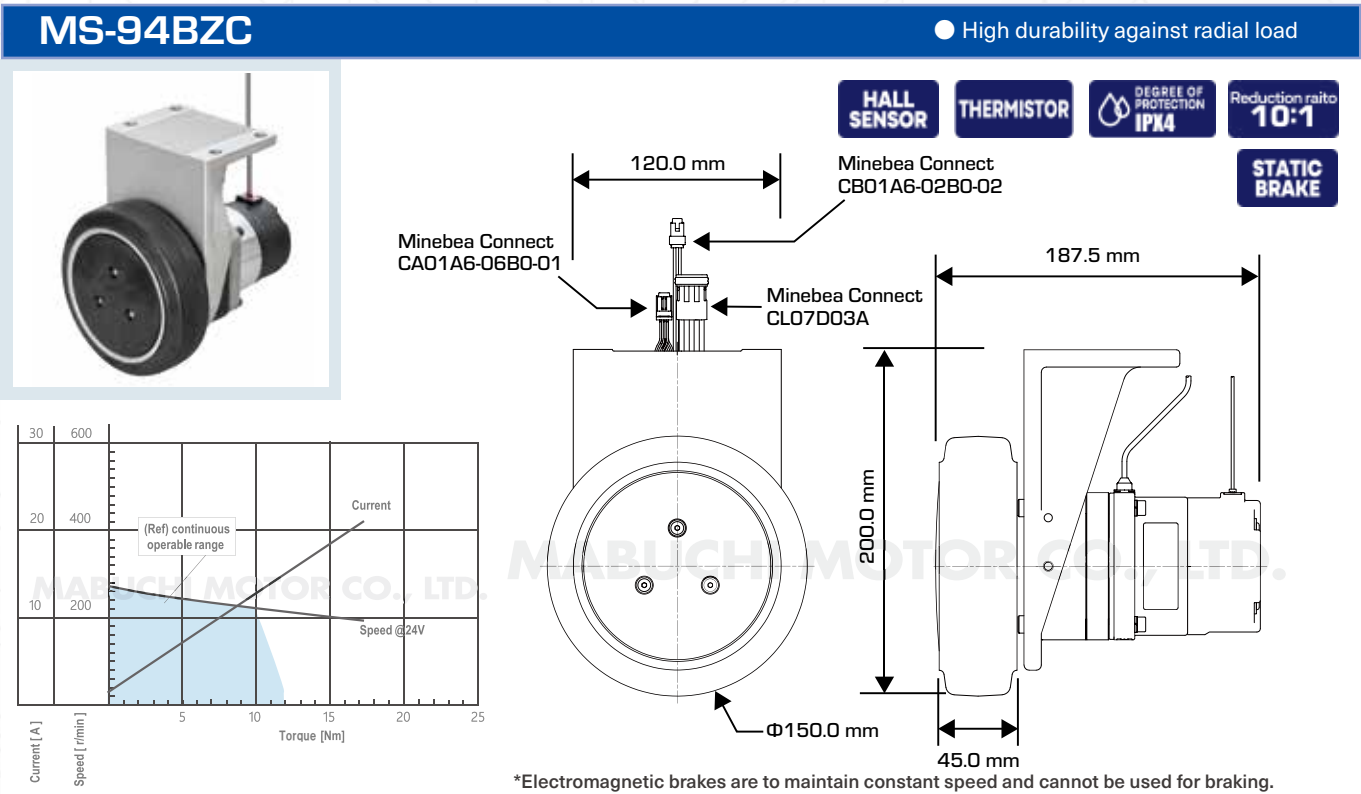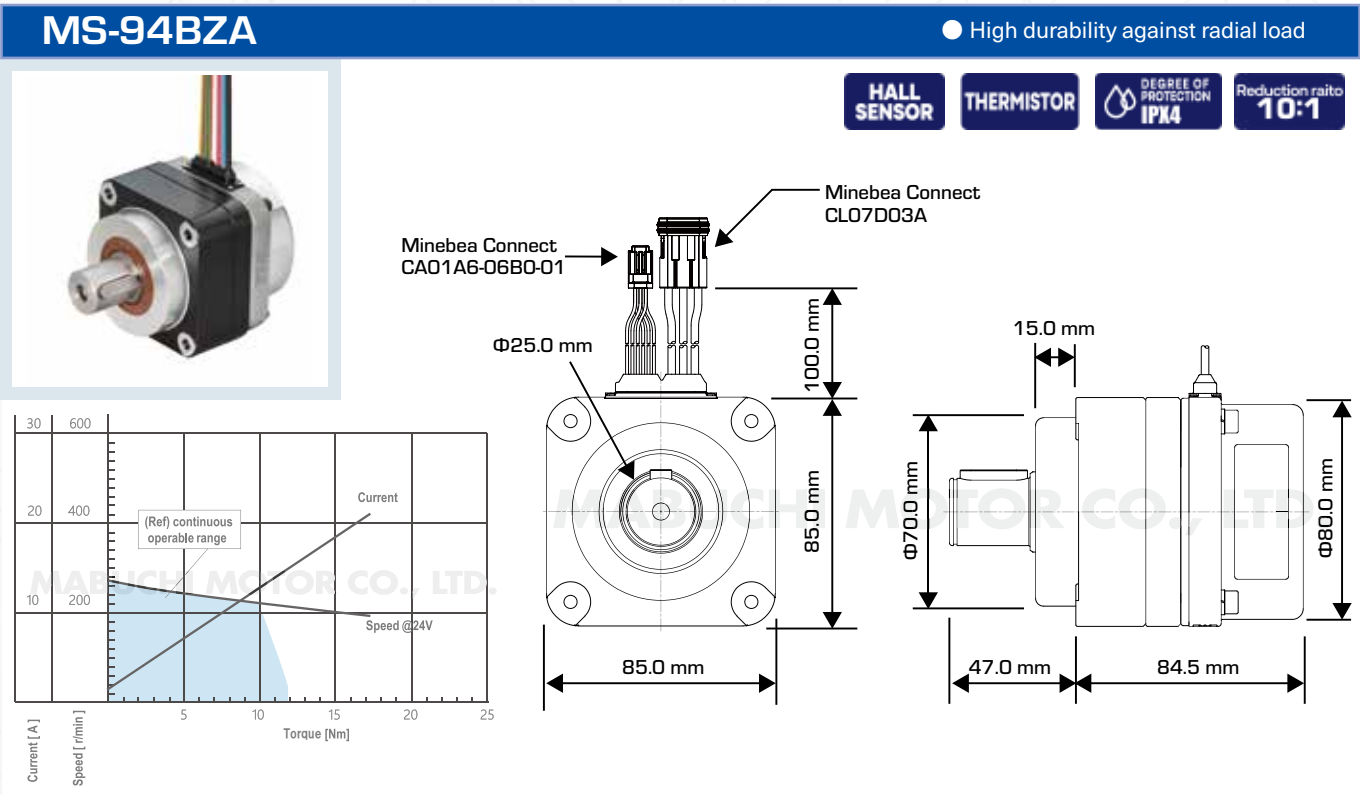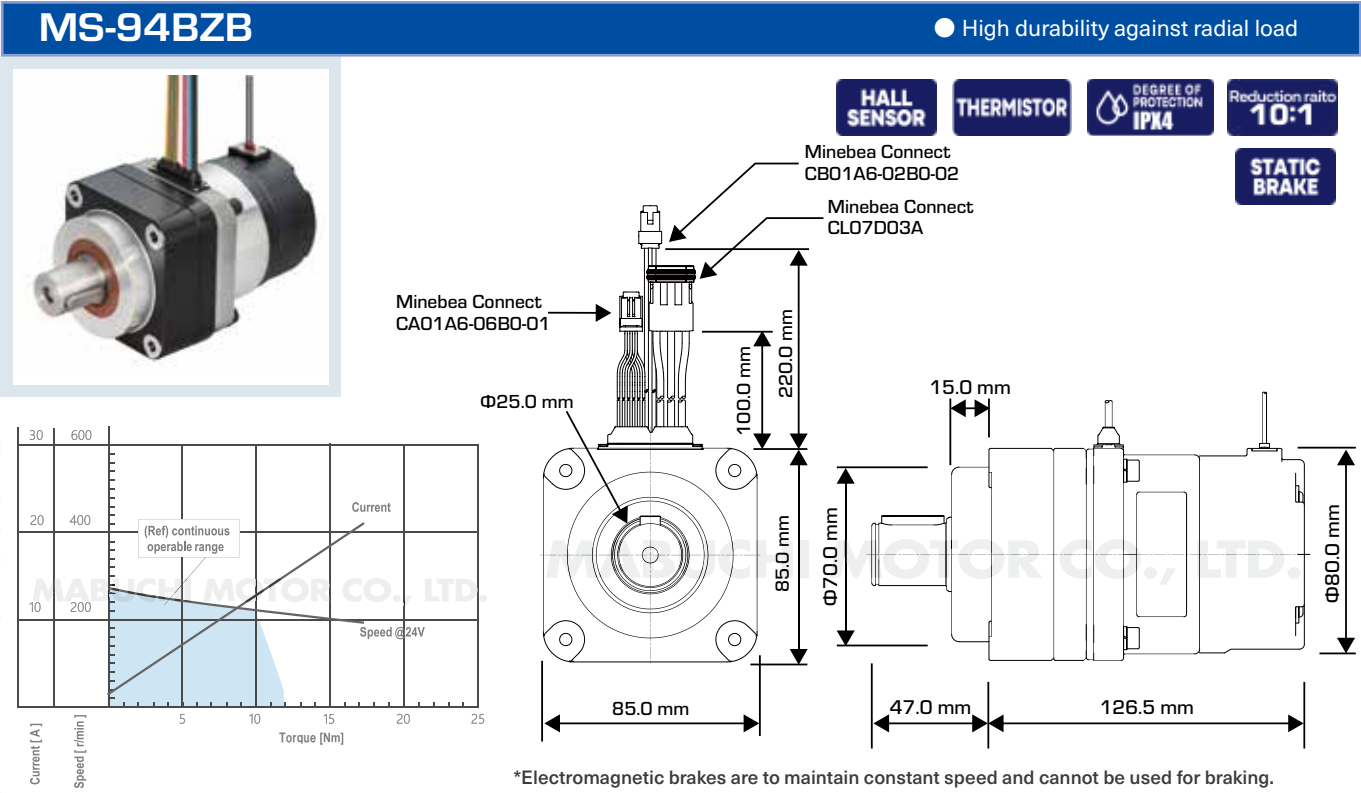

MS Series

The MS series brushless DC motor combines the IS series with additional accessories (gear reducer, static brake, foot-mount, wheel). The planetary gears offer reduction ratios of 10:1 and 20:1.

Model	MS-94BZD	MS-94BZE	MS-94BZF
Instant Maximum Output	327 W (10 sec max.)		
Instant Maximum Torque	30.0 Nm (10 sec max.)		
Rated Voltage	24 V		
Rated Output	203 W		
Rated Torque	16.0 Nm		
Rated Speed	121 r/min		
Operating Voltage	15 - 55 V		
Size	85.0 mm x 85.0 mm x 105.5 mm	85.0 mm x 85.0 mm x 147.5 mm	150.0 mm x 215.5 mm x 200.0 mm (Wheel Diameter : Φ 150.0 mm)
Weight	2.8 kg	3.4 kg	5.1 kg
Reduction Ratio	20 : 1		
Allowable Radial Load Bearing	700 N		
Allowable Load Inertia	0.6 kg/m2 max. (Applicable Acceleration Rate: 200 r/min/s)		
Withstand Voltage	500 V AC 1 minute (between terminal and case)		
Insulation Resistance	10 M Ω min. (500 V DC)		
Static Brake Operation Voltage at 20°C (ambient)	Power off type (for holding & emergency stops), Release voltage 24V, Holding voltage 12V		
Material			Wheels, Brackets: ADC12
			Wheels: Natural rubber
Degree of protection	IPX4 (Must use dedicated waterproof mating connector.)		

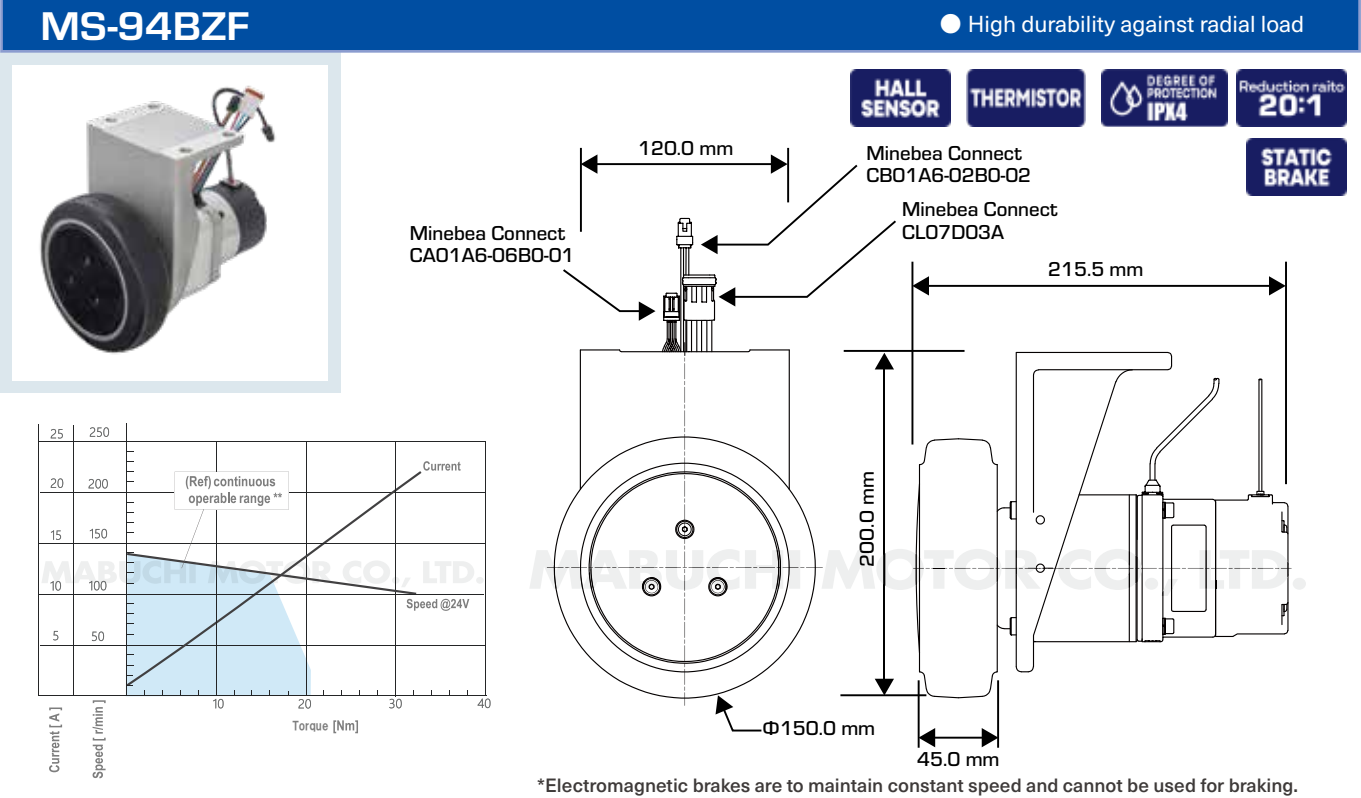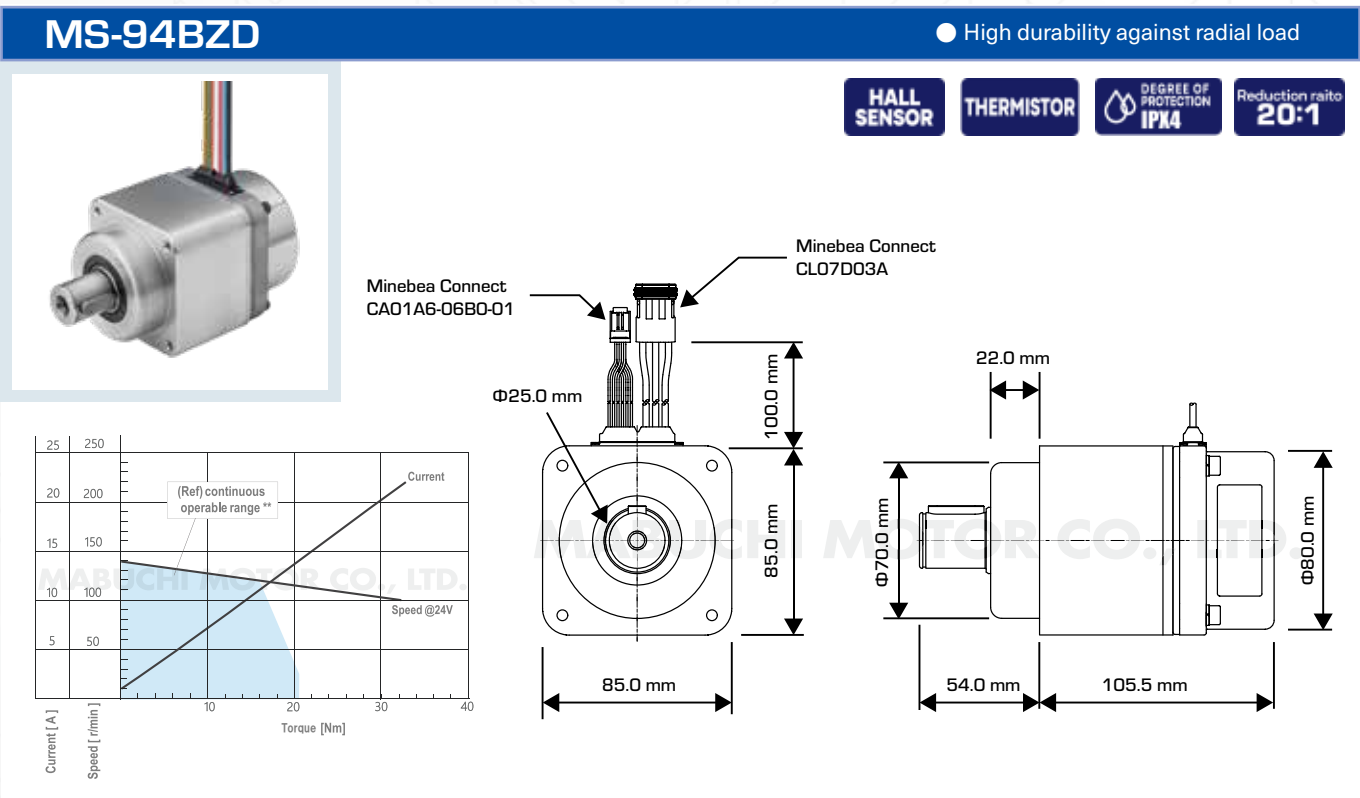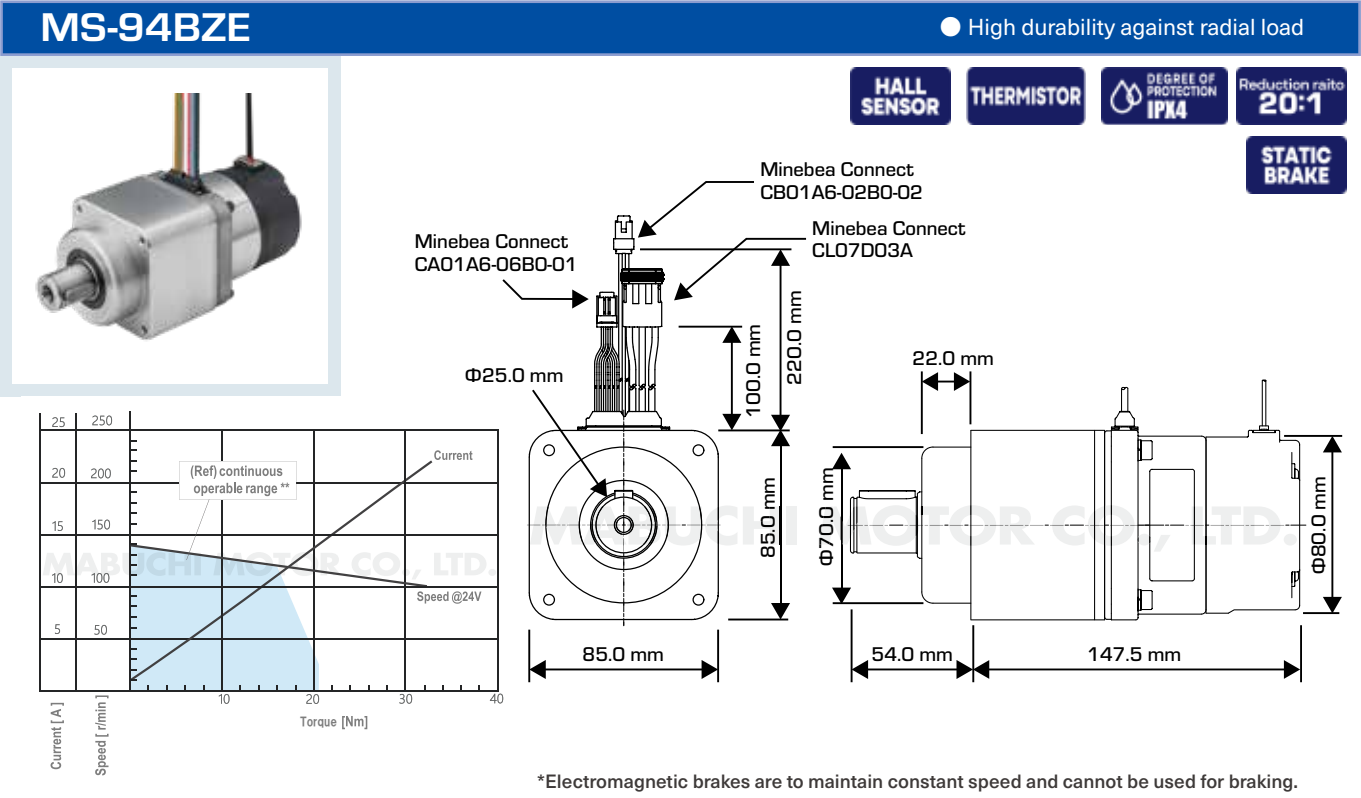

IR Series

The IR series brushless DC motor combines the IS series with a resolver equivalent to 15-bit resolution. These motors are suitable for AMR/AGV used in warehouses or factories, that require a stable performance at low speed and frequent stops.


Model	IR-74BZA	IR-94BZA
Instant Maximum Output	280 W (10 sec max.)	710 W (10 sec max.)
Instant Maximum Torque	0.9 Nm (10 sec max.)	2.0 Nm (10 sec max.)
Rated Voltage	24 V	48 V
Rated Output	200 W	355 W
Rated Torque	0.6 Nm	1.0 Nm
Rated Speed	3,200 r/min	3,400 r/min
Operating Voltage	17 - 60 V	
Size	60.0mm x 60.0mm x 66.5mm	85.0 mm x 85.0 mm x 65.5 mm
Weight	0.62 kg	1.1 kg
Allowable Radial Load Bearing	500 V AC 1 minute (between terminal and case)	
Insulation Resistance	10 MΩ min. (500 V DC)	
Degree of protection	IPX4 (Waterproof except at base of motor shaft. Must use dedicated waterproof mating connector.)	
Angle sensor	Current-detection type resolver sensor	

Features of the IR Series Motor Integrated Resolver

Precise Positioning


The motor with an integrated resolver, capable of 15-bit resolution, provides more precise positioning compared to hall sensors.

Resolution capability of conventional Hall sensor: 42 resolution capability/R ≈ 4-bit, 360 degrees/42=8.6 degrees
Resolution capability of Resolver: 56,000 resolution capability /R ≈ 15-bit, 360 degrees/56,000=0.006 degrees

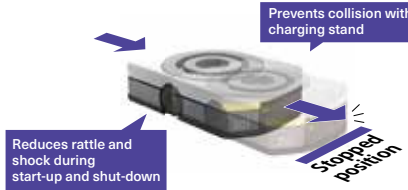


Robust Sensor Construction with Stable Sensing Capability

The uniquely engineered and in-house built resolver has a far higher resistance to heat, grease, dust and vibration compared to conventional encoders. The sensor, made of copper and steel plates, is robust and continues to perform reliably even in severe operating conditions.

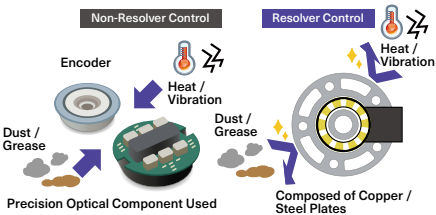


Can be operated at 24-48 V range

The motor and controller are optimized for 24-48 V DC battery-powered systems but have an overall operating range of 17-60 V.




Elaborate Speed Controlling

The motor speed is controllable in the 0-4,000 r/min range, ensuring smooth and precise rotation.



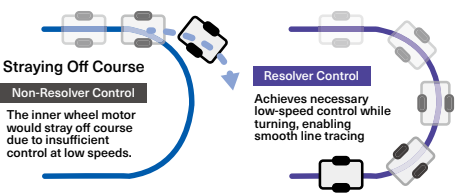


Smooth Acceleration and Motion




Due to the higher angular resolution of the resolver sensor, motor speed response is greatly improved; resulting in smooth, shock-free acceleration and motion.

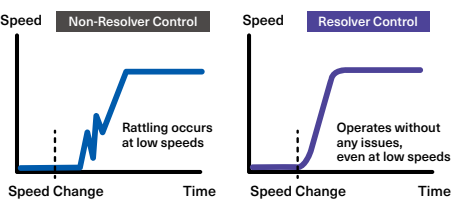

IR-74BZA

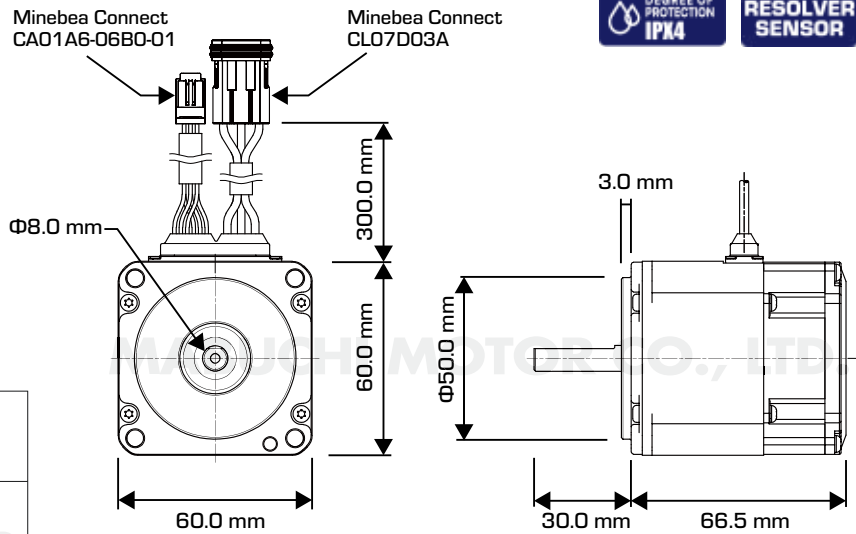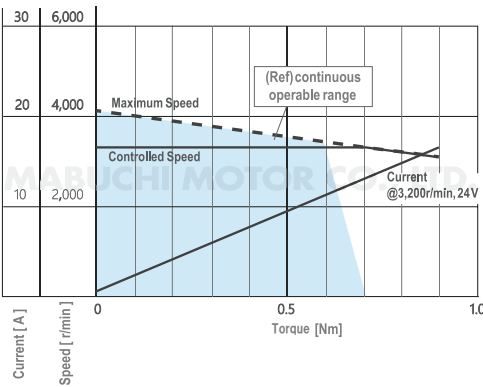

IR-94BZA

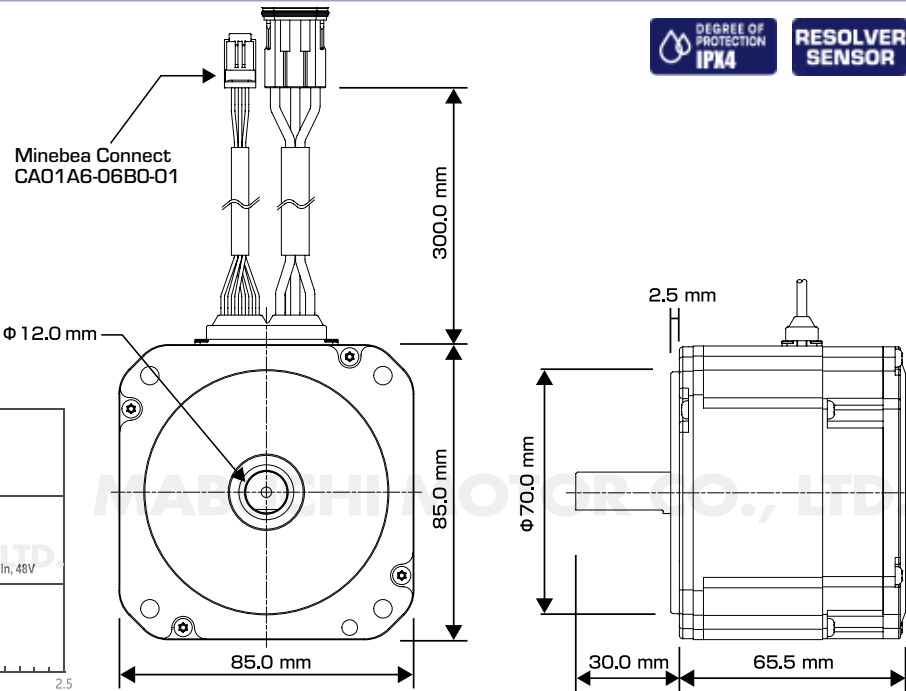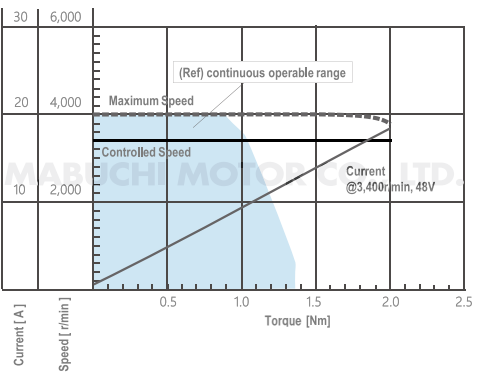



MR Series

The MR series motor is an IR series motor with a reduction gear, electromagnetic brake, etc., and is supplied as one fully integrated drop-in unit. The planetary gears offer reduction ratios of 10:1 and 20:1.

Model	MR-94BZA	MR-94BZB	MR-94BZD	MR-94BZE
Instant Maximum Output	320 W (10 sec max.)		300 W (10 sec max.)	
Instant Maximum Torque	17.2 Nm (10 sec max.)		30.0 Nm (10 sec max.)	
Rated Voltage	24V			
Rated Output	180 W		175 W	
Rated Torque	8.6 Nm		16.0 Nm	
Rated Speed	200 r/min		105 r/min	
Operating Voltage	17 - 60 V			
Size	85.0 mm × 85.0 mm × 104.5 mm	85.0 mm × 85.0 mm × 143.0 mm	85.0 mm × 85.0 mm × 125.5 mm	85.0 mm × 85.0 mm × 164.0 mm
Weight	2.5 kg	3.1 kg	3.1 kg	3.7 kg
Reduction Ratio	10.33 : 1		20 : 1	
Allowable Radial Load Bearing	700 N			
Allowable Load Inertia	0.6 kg/m2 max. (Applicable Acceleration Rate: 200 r/min/s)			
Withstand Voltage	500 V AC 1 minute (between terminal and case)			
Insulation Resistance	10 MΩ min. (500 V DC)			
Static Brake Operation Voltage at 20°C (ambient)	_____	Power off type (for holding & emergency stops), Release voltage 24V, Holding voltage 12V	_____	Power off type (for holding & emergency stops), Release voltage 24V, Holding voltage 12V
Degree of protection	IPX4 (Must use dedicated waterproof mating connector.)			
Angle sensor	Current-detection type resolver sensor			



MR-94BZB

● High durability against radial load

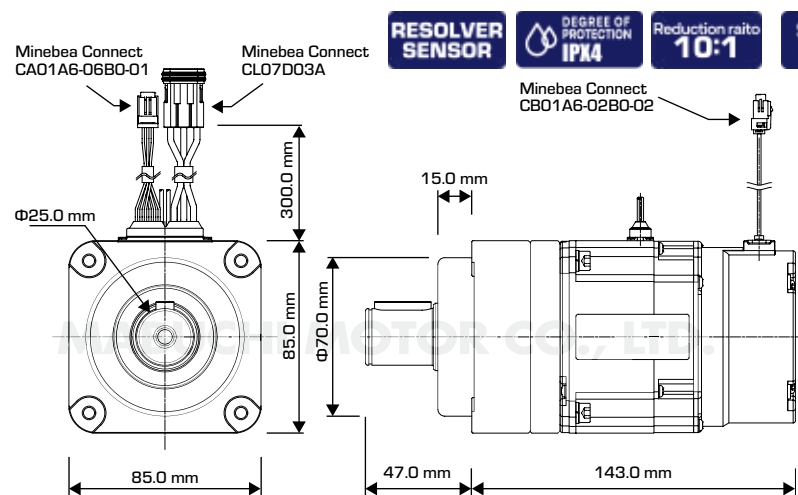
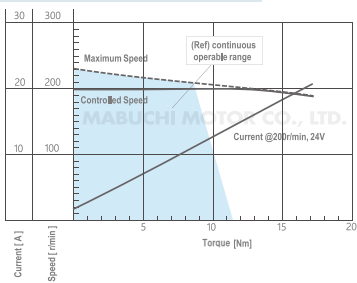


*Electromagnetic brakes are to maintain constant speed and cannot be used for braking.

MR-94BZD (Coming soon)

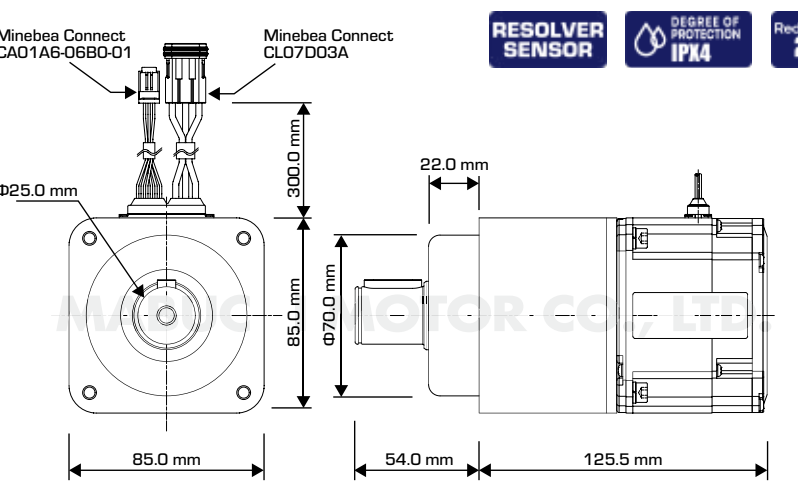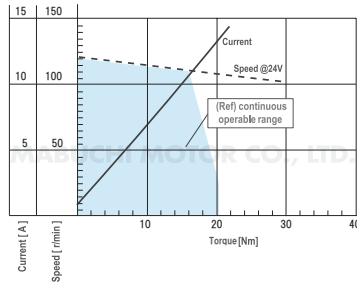



MR-94BZE (Coming soon)

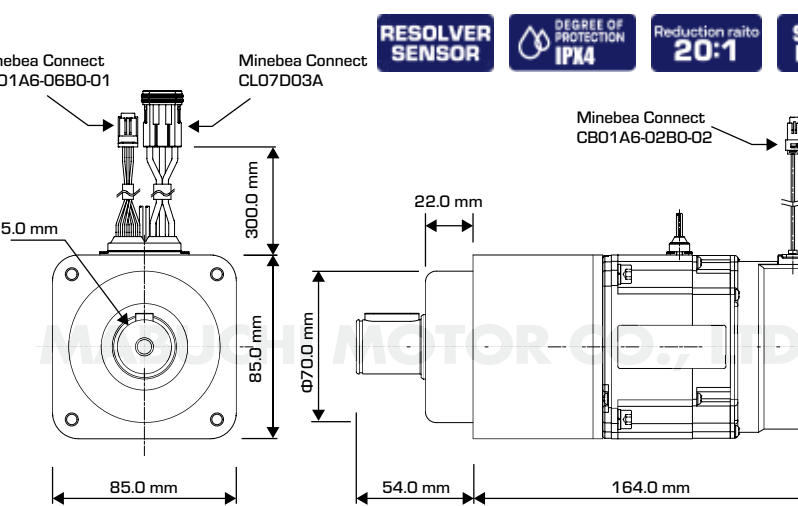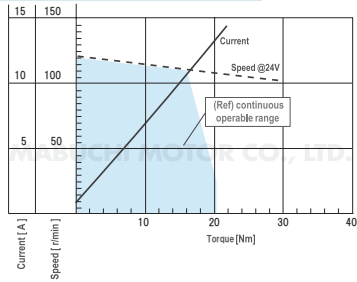

*Electromagnetic brakes are to maintain constant speed and cannot be used for braking.

MR-94BZA

● High durability against radial load

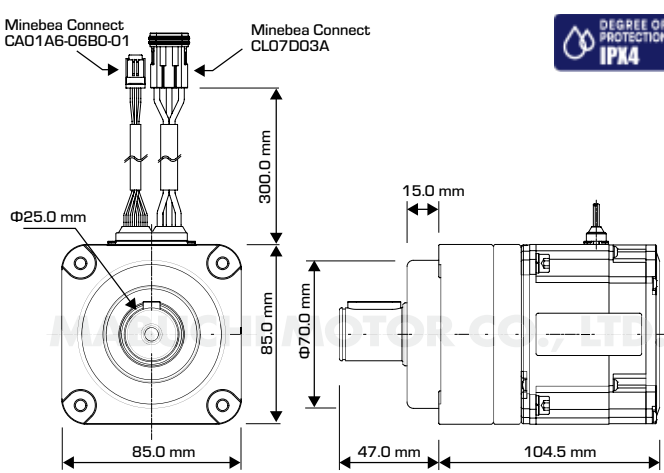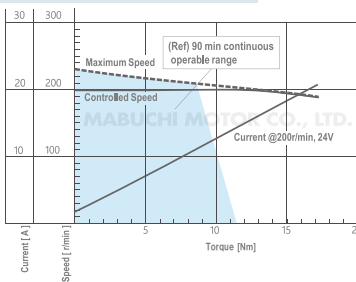

DS/DR Series (Controllers)

Optional Cables

DS/DR Series

The DS/DR Series controllers are optimized to work with battery-powered systems using Mabuchi motors. The controllers offer easy integration with no interference due to their low-EMI design and capability.



Model	DS-34EC1-IS311	DS-34EC1-L1300	DS-34EC1-IS221	DS-60FC1-L2500 (Preliminary Data)	DS-60FC3-L2500 (Preliminary Data)	DR40-FC1 (Preliminary Data)	DR-40FC1-R111A	DR-40FC3-R111A
Compatible Models	For IS-74	For MS-74	For IS-94/MS-94	For IS-B5B		For IR-74	For IR-94/MR-94	
Sensor System	Hall Sensor					Resolver		
Power-Supply Voltage Specifications	24-36 V DC (battery) Input Voltage Range: 17-45 V DC			24-48 V DC (battery) Input Voltage Range: 17-60 V DC				
Rated Output Current	9 Arms	6.6 Arms	9 Arms	14.0 Arms		9.0 Arms	11.5 Arms	
Peak Output Current	29 Apeak	20 Apeak	37 Apeak	34.1 Apeak		29 Apeak	37 Apeak	
Drive Method	Sine Wave Drive (Advanced Ignition Map)			Vector Control				
Control Function	Speed Control						Speed Control (Under Development: Torque Control, Positioning Control)	
Mandated Revolution Speed Range	100-4,000 r/min	60-3,000 r/min		100-5,000 r/min		0-4,000 r/min		
Interface	CAN Communication (Terminating Resistance: Enables Electrical Current Transition)			CAN Communication (Without Terminating Resistance)	CAN Communication (With Terminating Resistance)	CAN Communication (Without Terminating Resistance)		CAN Communication (With Terminating Resistance)
Size	116 mm × 88 mm × 29 mm			155 mm × 98 mm × 35 mm		116 mm × 88 mm × 29 mm		
Weight	220 g			700 g		220 g		
Degree of protection	IPX4							
Low Radiation Noise	CISPR32 Class B Compliant, EN55011 Class B Compliant							
Withstand Voltage	500 V AC 1 minute (Between Power Input Terminal and Case)							
Insulation Resistance	10 MΩ min. (500 V DC)							

Extension / Connection Cables

Extension and connection cables for further system integration available for purchase separately. Please contact us for information on various extension cables for IS-B5BZA and MS-B5BZD.




Classification	Motor Extension Cable			Controller Connection Cable	
Product Name	For Motor Power Source	For Motor Sensor	For Static Brake	For Power Source	For Communication
Part Number	67-Q22AA	67-Q23AA	41-L15XA	41-L11XA	41-L12XA
Length	1 m	1 m	1 m	1 m	1 m
Compatible Model	IS/IR/MS/MR Series	IS/IR/MS/MR Series	MS/MR Series (With Brake)	DS/DR Series	DS/DR Series


System Configurations

	Motor			Controller	
	Motor Only	Reduction Ratio 10:1	Reduction Ratio 20:1		
with Hall sensor	IS-74BZA	—	—	DS-34EC1-IS311	—
	—	MS-74BZA	MS-74BZD	DS-34EC1-L1300	—
	IS-94BZC	MS-94BZA	MS-94BZD	DS-34EC1-IS221	—
	IS-B5BZA	—	MS-B5BZD	DS-60FC1-L2500 ^{*1}	DS-60FC3-L2500 ^{*1}
with Resolver sensor	IR-74BZA	MR-74BZA	MR-74BZD	DR-40FC1 ^{*1}	—
	IR-94BZA	MR-94BZA	MR-94BZD	DR-40FC1-R111A	DR-40FC3-R111A

*1: under development

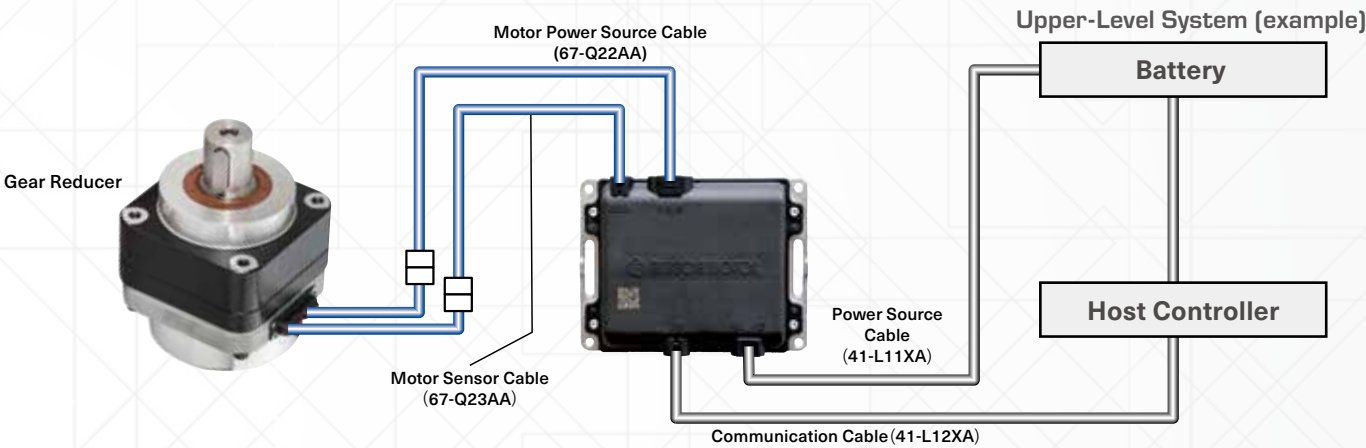

	Motor (with Static Brake)				Controller	
	Reduction Ratio 10:1		Reduction Ratio 20:1			
	without Wheel	with Wheel	without Wheel	with Wheel		
with Hall sensor	MS-74BZB	—	MS-74BZE	—	DS-34EC1-L1300	—
	MS-94BZB	MS-94BZC	MS-94BZE	MS-94BZF	DS-34EC1-IS221	—
	—	—	MS-B5BZE	—	—	—
with Resolver sensor	MR-74BZB	—	MR-74BZE	—	—	—
	MR-94BZB	—	MR-94BZE	—	DR-40FC1-R111A	DR-40FC3-R111A

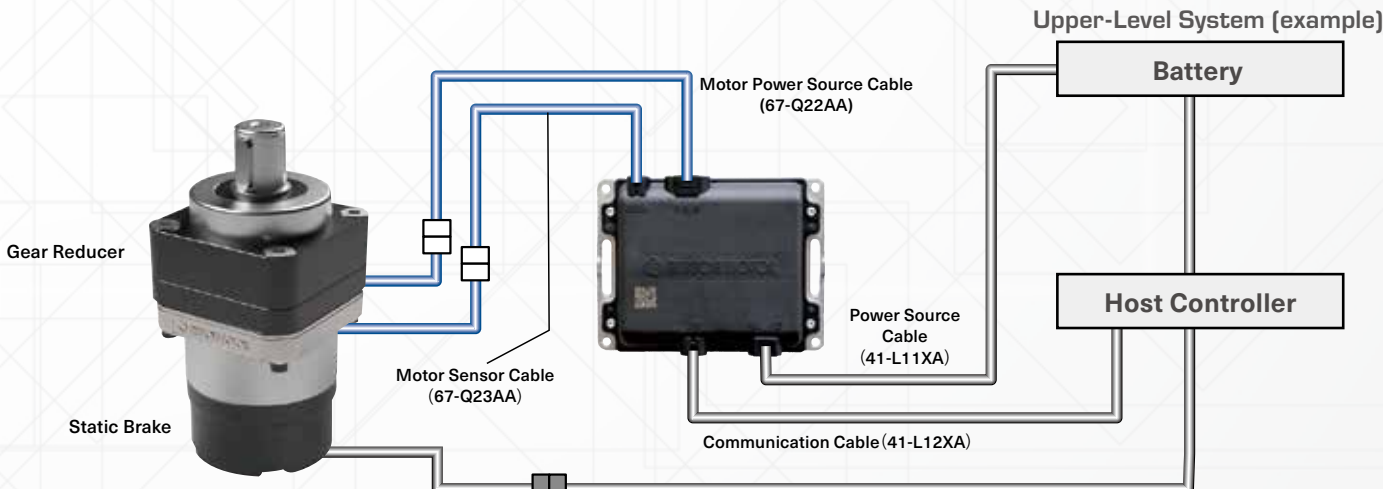

Extension or connection cables can be purchased separately. Refer to Page 16 for part number and description.

IA-IB Series

The IA-IB series frameless hollow-bore brushless DC motors are designed for robots or other non-automotive applications where built-in motors are required.

Suits a Wide Range of Applications

The motors, consisting of the rotor and stator, are available in four different outputs (200-950 W @48 V) and sizes (outer diameter of the stator, 60-120 mm).

Energy Saving Design


Uniquely engineered magnetic circuit helps to sustain high energy efficiency over long operating periods.

Smooth Movement

Low cogging for smooth motion.

Smaller, Lighter Products

The motor simply consists of the rotor and stator for easy installation and product downsizing.

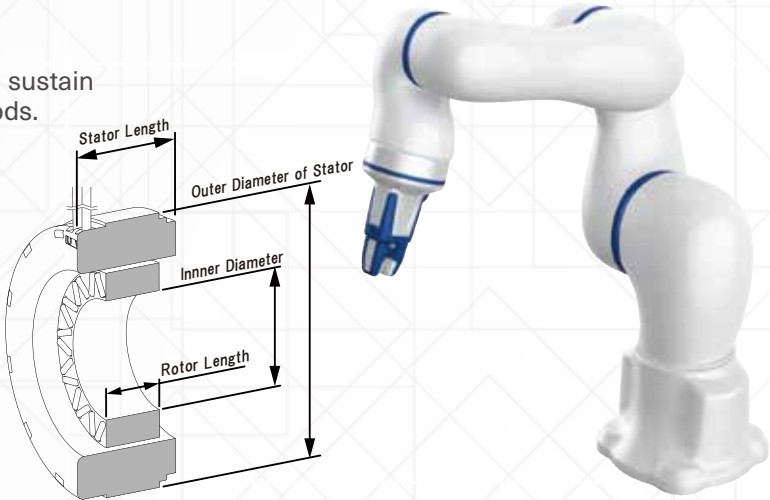



Model	IA-A3BZA/IB-A3BZA	IA-B4BZA/IB-B4BZA	IA-C5BZA/IB-C5BZA	IA-D5BZA/IB-D5BZA
Instant Maximum Torque	0.9 Nm (5 sec max.)	2.1 Nm (5 sec max.)	5.0 Nm (5 sec max.)	11.0 Nm (5 sec max.)
Rated Voltage	48 V			
Rated Output	200 W	500 W	650 W	950 W
Rated Torque	0.42 Nm	0.9 Nm	1.3 Nm	3.4 Nm
Rated Speed	4,600 r/min	5,300 r/min	4,800 r/min	2,700 r/min
Operating Voltage	15 - 55 V			
Outer Diameter of Stator	Φ 60.0 mm	Φ 75.0 mm	Φ 90.0 mm	Φ 120.0 mm
Inner Diameter	Φ 26.0 mm	Φ 35.0 mm	Φ 48.0 mm	Φ 55.0 mm
Stator Length	25.0 mm	32.0 mm	39.65 mm	45.1 mm
Rotor Length	14.2 mm	18.4 mm	22.9 mm	23.6 mm
Weight	0.19 kg	0.36 kg	0.6 kg	1.35 kg
Withstand Voltage	500 V AC 1 minute (Between the Lead Line and Laminated Core Part)			
Insulation Resistance	10 MΩ min. (500 V DC)			
International Standards (Conformity Directive)	CE (RoHS)			

CE declaration of conformity



Rated output, torque, and speed differs depending on the heat dissipation of the customer's casing.




IA-A3BZA / IB-A3BZA

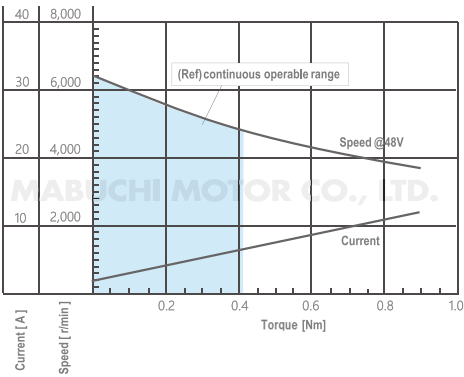


IA-B4BZA / IB-B4BZA

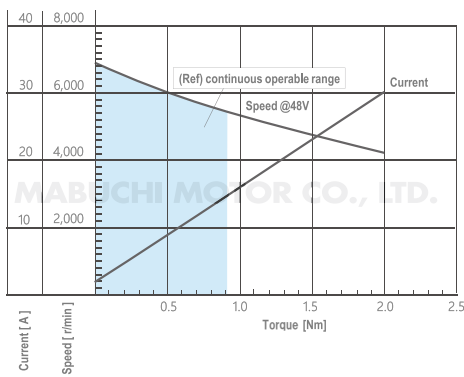

IA-C5BZA / IB-C5BZA

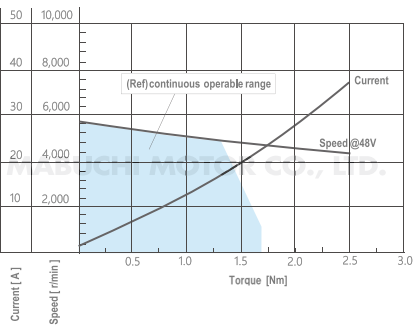


IA-D5BZA / IB-D5BZA

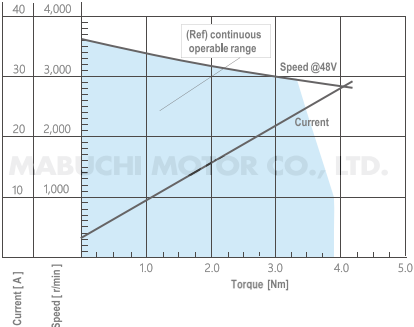

Installation Notes:

- Shafts, bearings and other parts needed for mounting the motor are not included.
- Take precautions when installing the rotor into the stator to prevent contact with surrounding parts due to magnet attraction or repulsion.
- Set the rotor/stator coaxially and ensure the gap between the rotor and stator (stack) is per the criteria as shown.
- For more details, instruction manuals can be downloaded from the Mabuchi website.



Brushless DC Motors (40mm Flange Size)

Coming Soon!



Product Features

1. Integrated driver enables the use of smaller wire harnesses.
2. The simplicity of DC power offers uncomplicated functionality in robotic and industrial applications.
3. Optional accessories, like gear reductions and parking brakes, are readily available.

ID-629ZB (Rated Output: 15 Watts)





Size :
40 mm × 40 mm × 38.8 mm

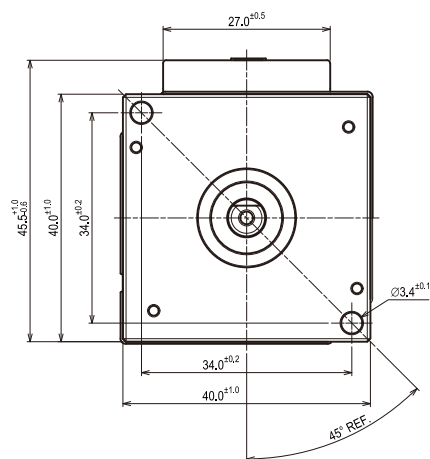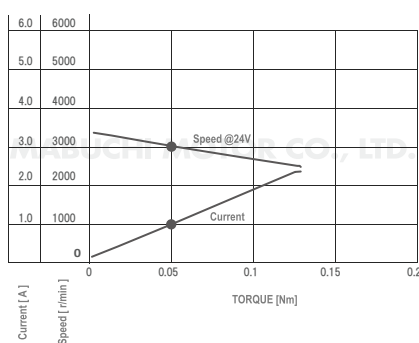

ID-659ZB (Rated Output: 70 Watts)



Size :
40 mm × 40 mm × 53.5mm

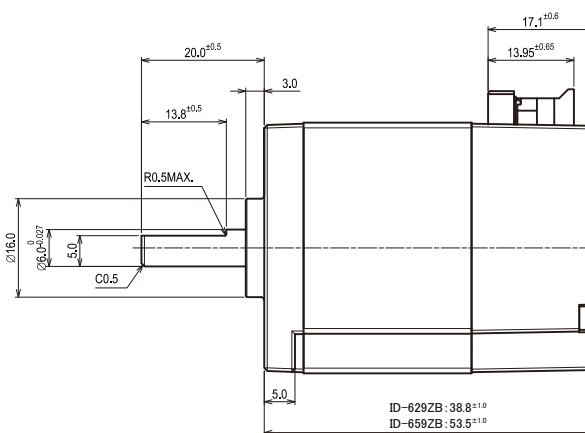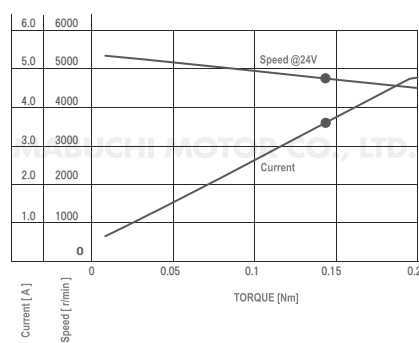

Preliminary Performance Specifications

DC 24V
Square-wave drive (neutral)

Motor Type	Performances at Rated Load Conditions			
	Output (W)	Torque (Nm)	Speed (rpm)	Current (A)
ID-629ZB 40mm x 40mm x 38.8mm	15	0.05	3,000	1.0
ID-659ZB 40mm x 40mm x 53.5mm	70	0.14	4,750	3.5



MABUCHI MOTOR CO., LTD.

Life and Industrial Product Business Unit
430 Matsuhidai, Matsudo City, Chiba
270-2280, Japan
81-47-710-1111

<https://solution.mabuchi-motor.com/en>

Worldwide Network

MABUCHI MOTOR AMERICA CORP.

3001 West Big Beaver Road, Suite 328,
Troy, MI 48064 U.S.A.
1-248-816-3100

**MABUCHI MOTOR (SHANGHAI)
MANAGEMENT CO., LTD.**

Room 1506-1510, Metro Plaza, No.555 Lou Shan
Guan Road, Changning District, Shanghai,
200051 China
86-21-6208-5666

MABUCHI MOTOR DANANG LTD.

LotA2, No.3 street, Hoa Khanh Industrial Zone,
Hoa Khanh Bac Ward, Lien Chieu District,
Da Nang City, Vietnam
84-236-3731931

MABUCHI MOTOR MEXICO S.A. DE. C.V.

Circuito Cerezos Oriente #105,
Parque Industrial San Francisco IV,
San Francisco De Los Romo, AGS 20355 Mexico
52-449-478-3200

**MABUCHI MOTOR (SHANGHAI)
MANAGEMENT CO., LTD. SHENZHEN BRANCH**

Unit 1601, Excellence Times Plaza, No.4068,
Yitian Road, Futian District, Shenzhen City,
Guangdong Province, 518017 China
86-755-2399-8568

MABUCHI MOTOR KOREA CO., LTD.

Ace High-End TowerIII 1403, 145,
Gasam Digital 1-Ro,Geumcheon-Gu, Seoul,
08506 Korea
82-2-534-8131

MABUCHI MOTOR (EUROPE) GmbH

Herriotstrasse 1, 60528 Frankfurt am Main,
Germany
49-69-6690220

MABUCHI TAIWAN CO., LTD.

No.18, Chunghwa Road, Hsinchu Industrial
District, Hsinchu, 30352 Taiwan
886-3-598-1111

MABUCHI MOTOR (THAILAND) CO., LTD.

4345 Bhiraj Tower at BITEC, 12Fl., Unit 1201,
Sukhumvit Road, South-Bangna Sub-district,
Bangna District, Bangkok, 10260, Thailand
66-2-091-0624